


- **L071WSA** Gooseneck Outlet Fitting, Panel Mounted, 6" Rigid Gooseneck
- **L072WSA** Same as Above Except with Swing Gooseneck
- **L074WSA** Same as Above Except with Rigid/Swing Gooseneck

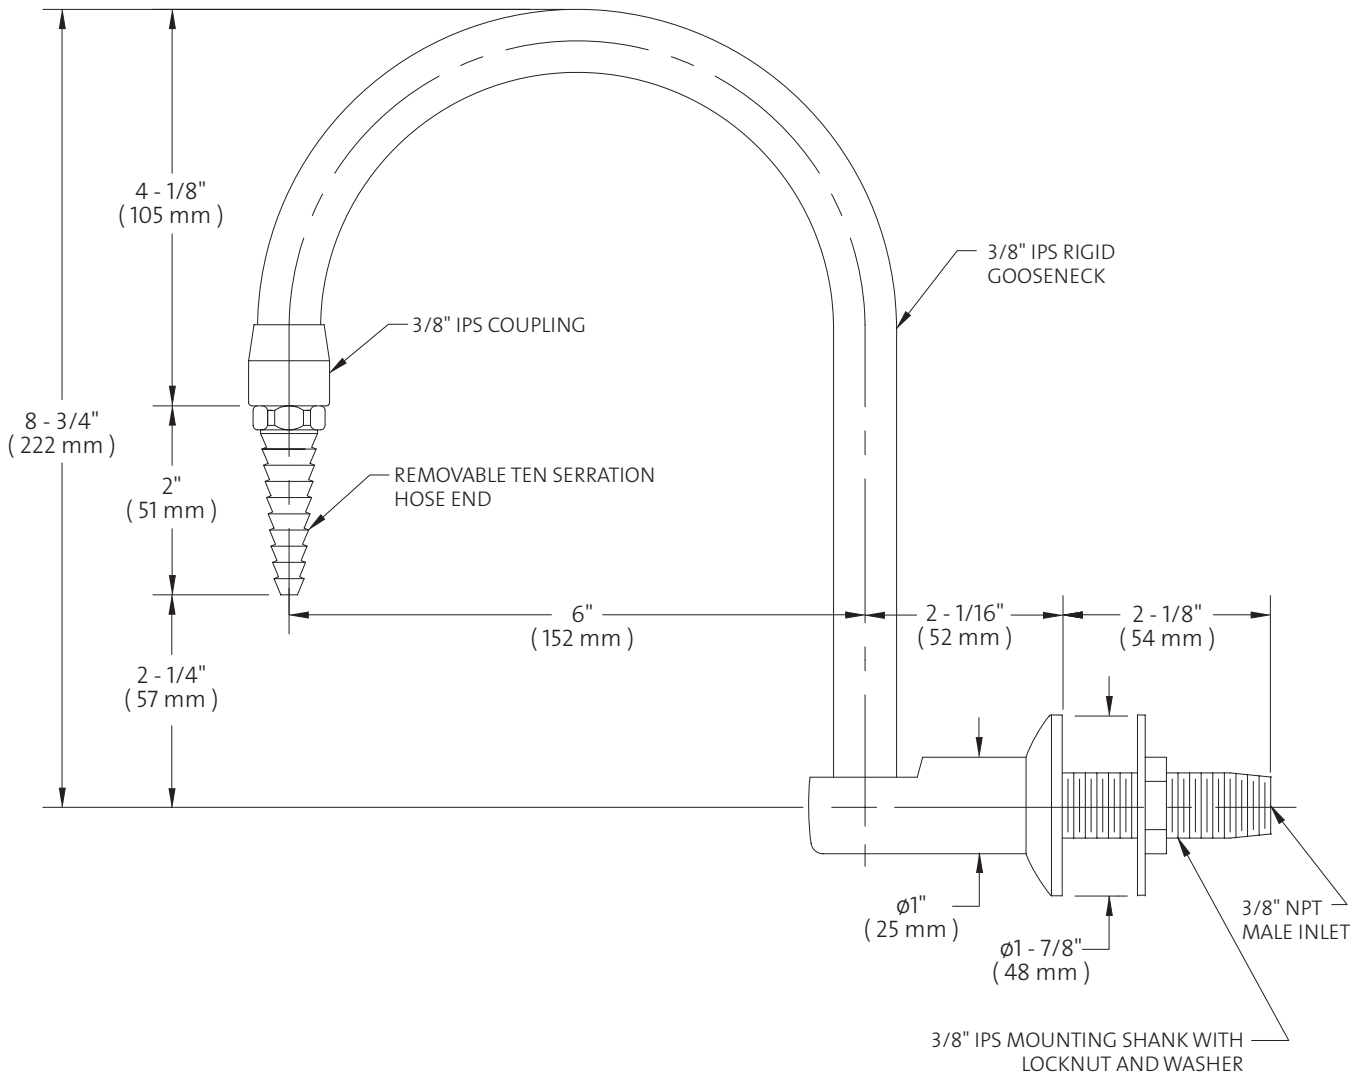

NOTES:

1. IF VACUUM BREAKER IS REQUIRED, ADD SUFFIX "VB." IF AERATOR IS REQUIRED IN PLACE OF HOSE END, ADD SUFFIX "55."
2. FITTING IS FURNISHED WITH EITHER A POLISHED CHROME PLATED OR A POWDER COATED FINISH ( COLOR-CODED PER SERVICE INDEX COLOR ) AS STANDARD. OTHER FINISHES ARE AVAILABLE UPON REQUEST.

Measurements may vary  $\pm 1/4"$ .

© 2008 / WaterSaver Faucet Co.